

Planetary gear


Properties:

General:	Multi-stage, closed planet gear For use in combination with our motors. Lifetime grease lubrication
Housing:	Steel annulus, aluminum flange User-defined installation
Tooth system tech.:	Internal gearing, hardened annulus Directly toothed motor shaft, optional shaft-mounted pinion
Options:	Ball bearing end shaft Special shafts



			1-stage	2-stage	3-stage							
Loading capacity	Max. radial force	N	160	230	300							
	Max. axial force	N	50	80	110							
	Max. input speed	rpm	3000	3000	3000							
	Temperature range	°C	-20° - +40°	-20° - +40°	-20° - +40°							
	Backlash	°DEG	0,7	0,75	0,8							
Mounting	Shaft diameter	mm	8	8	8							
	Weight	kg	0.3	0.4	0.5							
Transmission Ratios	i	Stages	M (Nm)	η	i	Stages	M (Nm)	η	i	Stages	M (Nm)	η
	3.7	1	3	0.8	26.9	2	7.5	0.75	93	3	15	0.7
	4.3	1	3	0.8	29	2	7.5	0.75	100	3	15	0.7
	5.2	1	3	0.8	35	2	7.5	0.75	115	3	15	0.7
	6.8	1	3	0.8	46	2	7.5	0.75	130	3	15	0.7
	13.7	2	7.5	0.75	51	3	15	0.7	150	3	15	0.7
	15.9	2	7.5	0.75	59	3	15	0.7	181	3	15	0.7
	18.4	2	7.5	0.75	68	3	15	0.7	236	3	15	0.7
	22	2	7.5	0.75	79	3	15	0.7	308	3	15	0.7

Dimensions

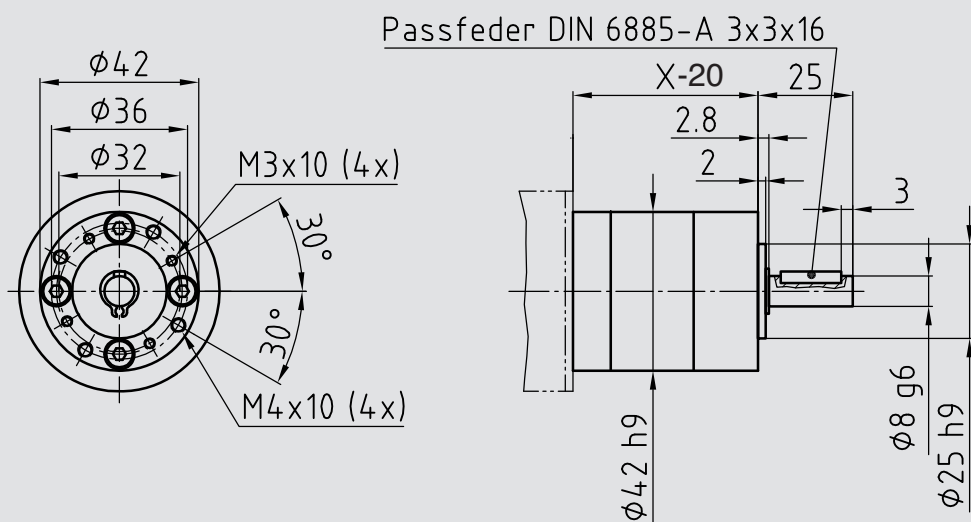

	1-stage	2-stage	3-stage
X	59	72	85

Dimension X may vary depending on mounting type and engine size